




Technical Specifications

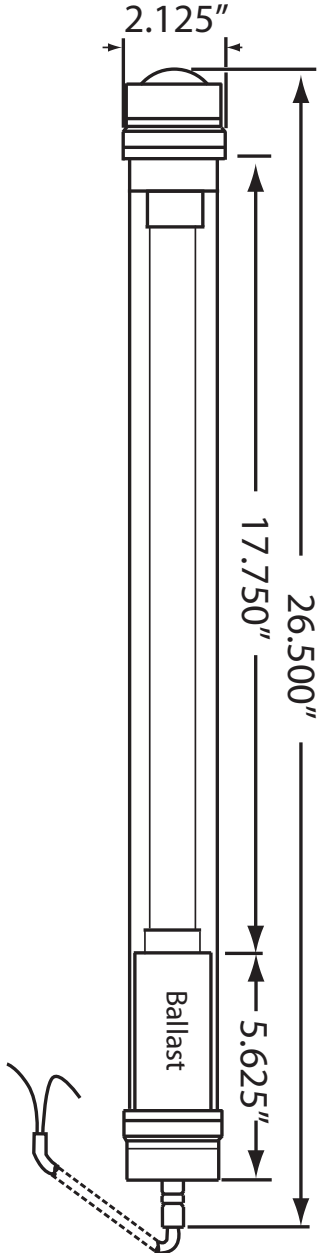

Safety Certifications	
ULeCUL Listed	
Waterproof Certification	
IP 54 (Splashproof)	
Dimensions	
• Length	26.500"
• Diameter	2.125"
• Beam	180°
• Net Weight	4 lbs.
Material Specifications	
• Plastic	PVC
• Lens	Polycarbonate/Lexan
Electrical Specifications	
• Voltage	24 VDC
• Cycle	N/A
• Ballast	Electronic ballast located in light head
• Amperage	.7
• Wattage	15
• Lumen rating	870
• Kelvin (color temperature)	4,100
• On/off switch	No
Cord Specifications	
• Certification	SJT (oil resistant)
• Length	25'
• Plug	N/A, wires directly into power source
• Composition	16 gauge 2-conductor copper wiring, SJT (oil resistant) certified neoprene jacket
Accessories/Options	
• Lens	Glass tube lens
• Mounting Brackets	FLP-1, FLP-2, FLP-3, FLP-4, FLP-5, FLP-6, FLP-7, FLP-8 (All Pictured Below)
• Bulbs	F15T8CW

Products specifications are subject to change.

See optional accessories below:

