




Technical Specifications

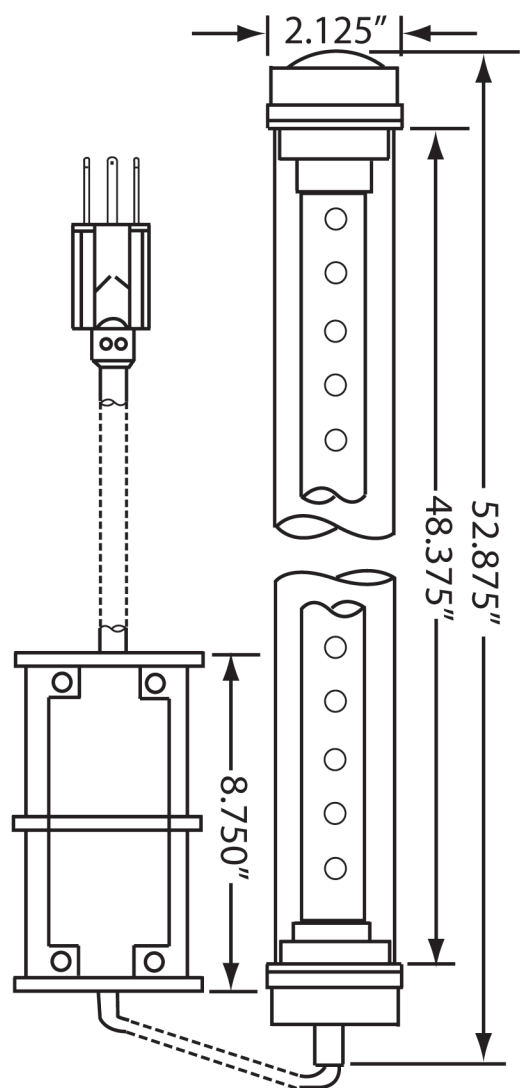

Safety Certifications	
CE Mark of Declaration, RoHS Compliant	
Waterproof Certification	
IP 67 (Waterproof under pressure)	
Dimensions	
• Length	52.875"
• Diameter	2.125"
• Beam	80°
• Net Weight	7.0 lbs
Material Specifications	
• Plastic	PVC
• Lens	Polycarbonate/lexan
Electrical Specifications	
• Voltage	100-240 VAC
• Cycle	50/60hz
• Driver	Variable voltage inline smart driver
• Amperage	.39 @ 120 VAC
• Wattage	40 watts
• Lumen rating	6,300
• Kelvin (color temperature)	5,000
• On/off switch	Push button at end cap
Cord Specifications	
• Certification	SJT (oil resistant)
• Length	25'
• Plug	Standard grounded US 3 prong male plug. (NEMA 5-15)
• Composition	16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket
Accessories/Options	
• Lenses	Glass tube lens
• Mounting Brackets	FLP-1, FLP-2, FLP-3, FLP-4, FLP-5, FLP-6, FLP-7, FLP-8 (All Pictured Below)

Product specifications are subject to change.

See optional accessories below:

